


薄片低压扇形喷嘴

CTC扇形喷嘴

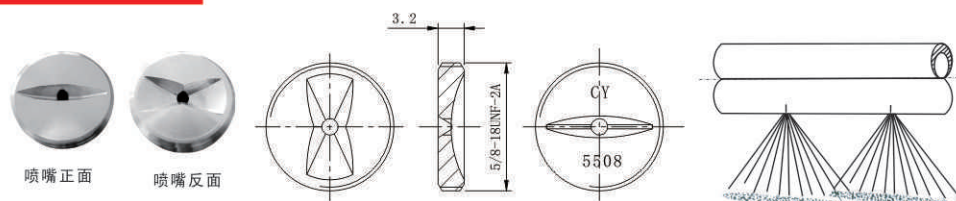

产品说明

当喷淋杆与网面或毛毯喷射高度很小时,该产品为最佳选择,喷嘴以303或316不锈钢制造,耐磨与抗腐蚀性能优良。

一、CTC性能参数

喷嘴型号	等效孔径 (mm)	材 料		流 量 (升/分)								3 巴 压力 下喷 射角度
		SS	316SS	1巴	2巴	3巴	4巴	5巴	6巴	7巴	10巴	
CTC-2510		·		2.3	3.2	3.9	4.6	5.1	5.6	6.0	7.2	25°
CTC-3580	6.4	·		18.2	26	32	36	41	45	48	58	35°
CTC-4040		·		9.1	12.9	15.8	18.2	20	22	24	29	40°
CTC-4047	4.7	·		10.7	15.1	18.6	21	24	26	28	34	
CTC-4067		·		15.3	22	26	31	34	37	40	48	
CTC-4070	5.5	·		16.0	23	28	32	36	39	42	50	
CTC-4085	6.4		·	19.4	27	34	39	43	47	51	61	43°
CTC-4308	1.9	·		1.8	2.6	3.2	3.6	4.1	4.5	4.8	5.8	50°
CTC-4313	2.4	·	·	3.0	4.2	5.1	5.9	6.6	7.3	7.8	9.4	
CTC-50033	1.2	·		0.75	1.1	1.3	1.5	1.7	1.8	2.0	2.4	
CTC-5024	3.2	·		5.5	7.7	9.5	10.9	12.2	13.4	14.5	17.3	
CTC-5033	4.0			7.5	10.6	13.0	15.0	16.8	18.4	19.9	24	55°
CTC-5037		·		8.4	11.9	14.6	16.9	18.9	21	22	27	
CTC-55054	1.6	·		1.2	1.7	2.1	2.5	2.8	3.0	3.3	3.9	
CTC-5508	1.9	·		1.8	2.6	3.2	3.6	4.1	4.5	4.8	5.8	
CTC-5824	3.2	·	·	5.5	7.7	9.5	10.9	12.2	13.4	14.5	17.3	58°
CTC-5833	4.0		·	7.5	10.6	13.0	15.0	16.8	18.4	19.9	24	60°
CTC-60054	1.6		·	1.2	1.7	2.1	2.5	2.8	3.0	3.3	3.9	65°
CTC-65054	1.6	·		1.2	1.7	2.1	2.5	2.8	3.0	3.3	3.9	
CTC-6513	2.4	·	·	3.0	4.2	5.1	5.9	6.6	7.3	7.8	9.4	
CTC-6519	2.8	·	·	4.3	6.1	7.5	8.7	9.7	10.6	11.5	13.7	
CTC-6533	4.0	·		7.5	10.6	13.0	15.0	16.8	18.4	19.9	24	
CTC-6550	4.7	·		11.4	16.1	19.7	23	25	28	30	36	
CTC-6570	5.5	·		16.0	23	28	32	36	39	42	50	68°
CTC-6824	3.2	·		5.5	7.7	9.5	10.9	12.2	13.4	14.5	17.3	
CTC-6840			·	9.1	12.9	15.8	18.2	20	22	24	29	
CTC-6864			·	14.6	21	25	29	33	36	39	46	
CTC-6870	5.5		·	16.0	23	28	32	36	39	42	50	70°
CTC-70023	1.0	·		0.52	0.74	0.91	1.0	1.2	1.3	1.4	1.7	80°
CTC-80032	1.2	·		0.73	1.0	1.3	1.5	1.6	1.8	1.9	2.3	
CTC-80054	1.6	·		1.2	1.7	2.1	2.5	2.8	3.0	3.3	3.9	
CTC-8008	1.9	·		1.8	2.6	3.2	3.6	4.1	4.5	4.8	5.8	
CTC-80084	1.9	·		1.9	2.7	3.3	3.8	4.3	4.7	5.1	6.1	
CTC-8013	2.4		·	3.0	4.2	5.1	5.9	6.6	7.3	7.8	9.4	
CTC-8024	3.2	·		5.5	7.7	9.5	10.9	12.2	13.4	14.5	17.3	
CTC-8033	4.0	·		7.5	10.6	13.0	15.0	16.8	18.4	19.9	24	
CTC-8040				9.1	12.9	15.8	18.2	20	22	24	29	
CTC-90016	0.79	·		0.36	0.52	0.63	0.73	0.82	0.89	0.96	1.2	
CTC-90054	1.6	·		1.2	1.7	2.1	2.5	2.8	3.0	3.3	3.9	
CTC-9013	2.4	·		3.0	4.2	5.1	5.9	6.6	7.3	7.8	9.4	