


## 薄片高压扇形喷嘴

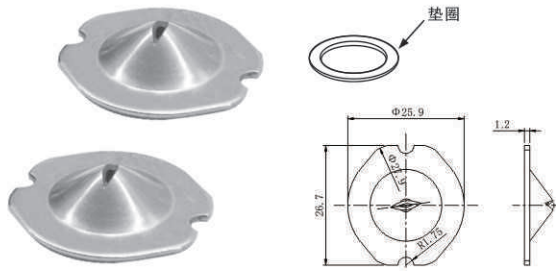

CCTC 型喷嘴为带刷喷淋杆专门设计的低压扇形喷嘴,喷嘴角度为0°、30°、60°、75°四种,喷嘴在安装时需配套垫圈

### 订购信息

**CCTC — CY6008 — 316SS**

型号      角度和流量代码      材质

### CCTC喷嘴性能参数

喷嘴型号	等效孔径 (mm)	流量 (升/分)					喷射角度 3巴
		1.5巴	3巴	7巴	20巴	55巴	
CCTC-0002	1.0	0.64	0.91	1.4	2.3	3.9	0°
CCTC-0003	1.2	0.92	1.3	2.0	3.4	5.6	
CCTC-0004	1.5	1.2	1.7	2.6	4.4	7.3	
CCTC-0006	1.8	1.7	2.4	3.7	6.2	10.3	
CCTC-0008	2.0	2.2	3.1	4.8	8.1	13.4	
CCTC-0010	2.2	2.8	4.0	6.2	10.4	17.2	
CCTC-3012	2.5	3.5	4.9	7.5	12.6	21	30°
CCTC-3016	2.8	4.5	6.3	9.7	16.4	27	
CCTC-3020	3.0	5.5	7.8	11.9	20	33	
CCTC-3025	3.5	7.2	10.1	15.5	26	43	
CCTC-3031	4.0	8.8	12.4	18.9	32	53	
CCTC-3040	4.5	11.3	15.9	24	41	68	
CCTC-3049	5.0	13.7	19.4	30	50	83	
CCTC-3078	6.0	22	31	48	81	135	
CCTC-3099	7.0	29	39	60	101	167	
CCTC-30124	8.0	35	49	75	126	210	
CCTC-6002	1.0	0.64	0.91	1.4	2.3	3.9	60°
CCTC-6003	1.2	0.92	1.3	2.0	3.4	5.6	
CCTC-6004	1.5	1.2	1.7	2.6	4.4	7.3	
CCTC-6006	1.8	1.7	2.4	3.7	6.2	10.3	
CCTC-6008	2.0	2.2	3.1	4.8	8.1	13.4	
CCTC-6010	2.2	2.8	4.0	6.2	10.4	17.2	
CCTC-6012	2.5	3.5	4.9	7.5	12.6	21	
CCTC-6016	2.8	4.5	6.3	9.7	16.4	27	
CCTC-6020	3.0	5.5	7.8	11.9	20	33	
CCTC-6025	3.5	7.2	10.1	15.5	26	43	
CCTC-6031	4.0	8.8	12.4	18.9	32	53	
CCTC-3040	4.5	11.3	15.9	24	41	68	
CCTC-6049	5.0	13.7	19.4	30	50	83	
CCTC-6078	6.0	22	31	47	80	133	
CCTC-6099	7.0	28	39	60	101	167	
CCTC-60124	8.0	35	49	75	126	210	
CCTC-7502	1.0	0.64	0.91	1.4	2.3	3.9	75°
CCTC-7503	1.2	0.92	1.3	2.0	3.4	5.6	
CCTC-7504	1.5	1.2	1.7	2.6	4.4	7.3	
CCTC-7506	1.8	1.7	2.4	3.7	6.2	10.3	
CCTC-7508	2.0	2.2	3.1	4.8	8.1	13.4	
CCTC-7510	2.2	2.8	4.0	6.2	10.4	17.2	
CCTC-7512	2.5	3.5	4.9	7.5	12.6	21	
CCTC-7516	2.8	4.5	6.3	9.7	16.4	27	
CCTC-7520	3.0	5.5	7.8	11.9	20	33	
CCTC-7525	3.5	7.2	10.1	15.5	26	43	
CCTC-7531	4.0	8.8	12.4	18.9	32	53	
CCTC-7541	4.5	11.3	15.9	24	41	68	
CCTC-7549	5.0	13.7	19.4	30	50	83	
CCTC-7578	6.0	22	31	48	81	133	
CCTC-7599	7.0	28	39	60	101	167	
CCTC-75124	8.0	35	49	75	126	210	